


Specifications

Module	Vanish 8T	Vanish 8T half
Pixel Pitch	8.9mm	8.9mm
Max. Brightness Calibrated	4,000nits	4,000nits
Panel Dimension	1000 x 1000 x 95mm 39.4" x 39.4" x 3.74"	1000 x 500 x 95mm 39.4" x 19.7" x 3.74"
Panel Resolution (H x V)	112 x 112	112 x 56
Weight Per Panel	16.5kg; 36.37lbs	10kg; 22.05lbs
Power Consumption (Max/Average)	480W / 240W	480W / 240W
BTU Max/Average	1638 / 753	921 / 424
Transparency	50%	50%
Serviceability	Rear	Rear
Curving (Concave & Convex)	Concave 10°-Convex 10° (option)	Concave 10°-Convex 10° (option)
Max. Hanging (panels)	22	44
Max. Stacking (panels)	11	22
LED Configuration	SMD1515 White	SMD1515 White
Viewing Angle Vertical	140°	140°
Viewing Angle Horizontal	160°	160°
Scan Ratio	1/4	1/4
Refresh Rate	3840Hz	3840Hz
Gray Scale	16bit	16bit
Frame Material	Aluminium alloy	Aluminium alloy
Operational Temp / Humidity	-20°~ 45°C, 10-90%RH / -4°~113°F, 10-90%RH	-20°~ 45°C, 10-90%RH / -4°~113°F, 10-90%RH
IP Rating	Outdoor	Outdoor
Certifications	CE, ETL, FCC	CE, ETL, FCC

Dimensions

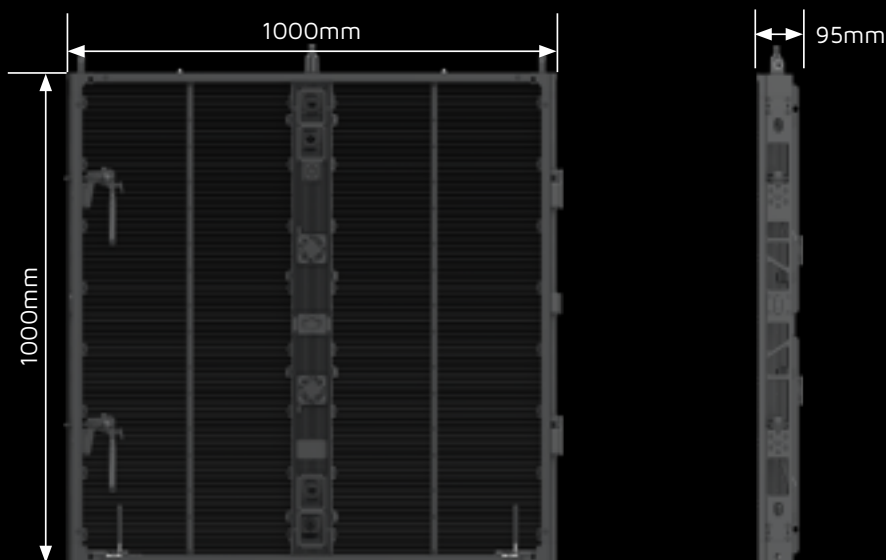

www.roevisual.com

ROE Visual Co., Ltd. | ROE Visual US, Inc. | ROE Visual Europe BV
roe@roevisual.com | usa@roevisual.com | europe@roevisual.com